
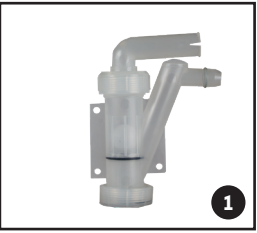
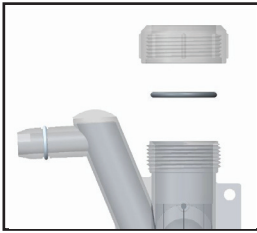



Siphon & Configurations


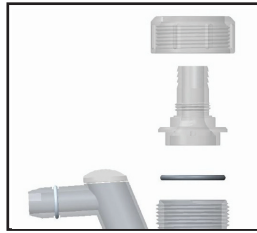




Attaches to any InnoFlue 32mm drain. Allows condensates to flow while unique ball valve assures combustion gases remain contained at higher temperatures. Comes with and can be installed with a barbed or compression fitting. See configuration options below.

NOTE: If used with an external drain, the drain tube must be vented or left open-ended.

			
Siphon	Drain	Barbed	Non-Return Valve
IASJVBS	Gasket and cap create 32 mm compression fitting on any InnoFlue drain	Fits 5/8th" tube. Field supply silicon tubing, clamp	NRV supplied by appliance manufacturer


Condensate Management Components

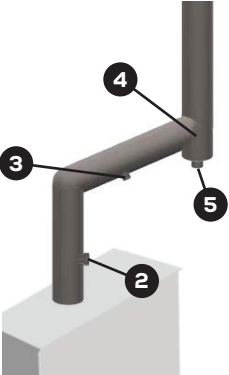Place test ports immediately in exhaust run, and drain tee at first horizontal segment of the run

					
	Test Port	Horizontal Drain Fitting	Tee	Cap w/ Drain	Cap
	ISTP	ISHDT	IST	ISTCD	ISTC
All InnoFlue drains are 32mm					


Cascade Components

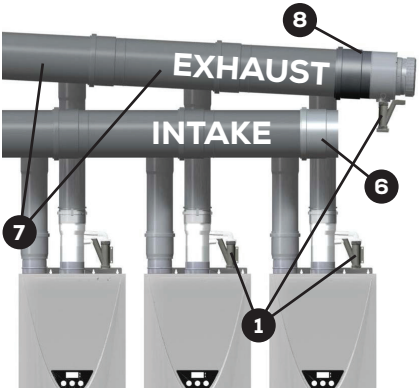

InnoFlue cascade kits available up to 12".



NOTE:
Exhaust must be pitched back to the appliance.

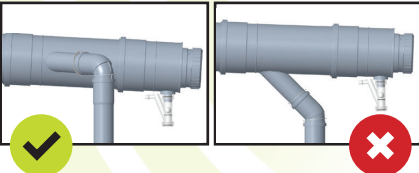NOTE:
Non-Return Valves must be supplied by the appliance manufacturer



	
Branch Tee	Manifold Drain Cap
ISBT	ISHDF
Consult appliance I&O manual.	